

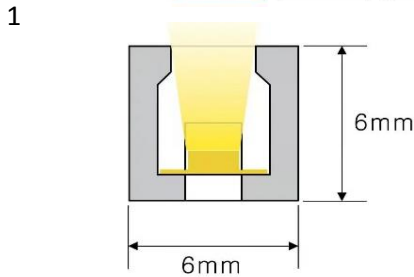



IP67 Silicone Neon Flex
Vertical Bending / Top View Series
0500-000-0000



Min. bending \varnothing : 200mm
24VDC (min. Cut:50mm)
6W/m
Constante current
T6x6mm




6W Article no. 0505-006-0000 350Lm/m (3000K) Max length: 5m




Cable connection position:
(with standard IP67 endcaps)

- 1/Cable can be out from end
- 2/Cable can be out from side
- 3/Cable can be out from bottom

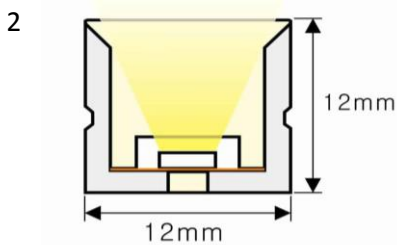


Min. bending \varnothing : 200mm
24VDC (min. Cut:50mm)
5 or 10W/m
Constante current
T12x12mm



5W: Article no. 0512-005-0000 300Lm/m (3000K) Max length:19m
10W: Article no. 0512-010-0000 575Lm/m (3000K) Max length:13m




Cable connection position:
(With IP67 injection mold end caps)




Option I

Option II

Option III

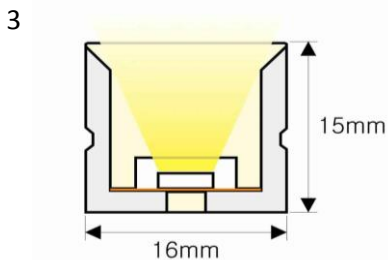

Min. bending \varnothing : 200mm
24VDC (min. Cut:50mm)
5; 10 or 15 W/m
Constant current
T16x15mm



5W: Article no. 0516-005-0000 300Lm/m (3000K) Max length:27m
10W: Article no. 0516-010-0000 575Lm/m (3000K) Max length:17m
15W: Article no. 0516-015-0000 810LM/m (3000K) Max length:12m



Cable connection position:
(With IP67 injection mold end caps)



Option I

Option II

Option III

***** Customer Lengths Ex Works & All Specification and prices on request *****



Mounting systems	1	2	3
Clips	0505-MC	0512-MC	0516-MC
Alu. Profile (2m)	0505-200	0512-200	0516-200
Snake profile (0,5m)	0505-CR	0512-CR	0516-CR

Durable – Delightfull – LED