

Description

**Round Ceiling Downlight**  
( Power & CCT Adjust)

Technical Specifications

LED Power(W) <b>dip-Switch</b>	18 or 25W
Mounting	Bracket
Lumen output (Lm)	2750Lm @4000K (25W)
Lumen/Watt	110Lm/W
CCT (K) <b>dip-Switch</b>	3000K, 4000K or 6000K
beam angle(°)	120°
IK factor	10
CRI	>85
<b>IP factor</b>	<b>54</b>
Inpute (Vac)	220-230V 50Hz
energy class	F
LED chip	2835SMD
LED Flicker free	EPISTAR
Power factor	>0,95
<b>* Quick connection without opening the housing</b>	
Driver included	yes
Workings temp.	-40° / +50°
Warranty	3 Years
Dimmable	Option
dimensions: Ø x h (mm)	330x48mm
life time	45000Hrs
Weight	0,7kg

**With Power & Color change Dip switch**

**Project prices on request !**

01/2025

Available in:

**18 & 25W with colorchanging**

**+ motion sensor (time, distance adjust)**

**+ 3W, 3Hrs Emergency Kit**

**+ sensor & Emergency Kit**


Article no.

**0260-025-0001**

**0260-025-0002**

**0260-025-0003**

**0260-025-0004**

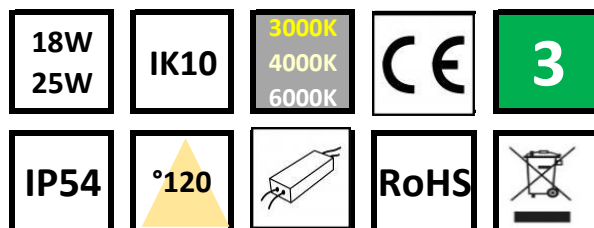

**Durable – Delightfull – LED**

