


Description

**Low Profile LED Module RGB+CCT**

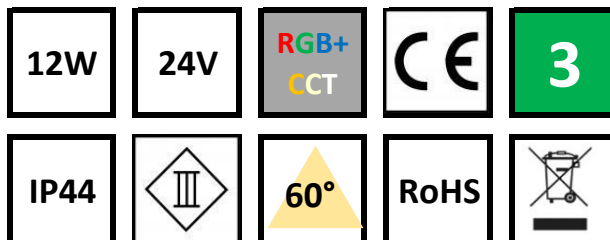

Technical Specification

LED power (W)	12W
Mounting method:	Recessed Fixtures
Lumen/W (Lm)	85Lm/W
Lumen output	1050Lm
CCT	RGB+CCT(2000K-6000K)
UGR	<19
Beam Angle (°)	60° (reflector)
CRI	Ra>90
<b>IP</b>	<b>IP44</b>
DC Inpute (Vac)	24VDC
Power factor	>0,95
LED chip	CREE
Dimmable:	PWM
Material	Alum. + Glass
Power coating finish:	Black or White
Warranty	3 years
Lifetime (Hr)	L80B20: 50000Hrs
Dimension: Ø x h (mm)	Ø50xH52mm

High quality LED with consistent color temperature.

Ideal for DC 24V KNX, DALI, LOXONE, DMX, TUYA, CASAMBI

08/2024



*Durable – Delightfull – LED*

