

Description

Low Profile LED Module RGBW


Technical Specification

LED power (W)	12W
Mounting method:	Recessed Fixtures
Lumen/W (Lm)	70Lm/W
Lumen output	840Lm (all color 100%)
CCT	RGB+W(3000K)
UGR	<19
Beam Angle (°)	60° (reflector)
CRI	Ra>90
IP	IP44
DC Inpute (Vac)	24VDC
Power factor	>0,95
LED chip	CREE
Dimmable:	PWM
Material	Alum. + Glass
Power coating finish:	Black or White
Warranty	3 years
Lifetime (Hr)	L80B20: 50000Hrs
Dimension: Ø x h (mm)	Ø50xH52mm
High quality LED with consistent color temperature.	
Ideal for DC 24V KNX, DALI, LOXONE, DMX, TUYA, CASAMBI	

01/2024

Available in:
RGBW

Article No.
1650-012-RGBW30

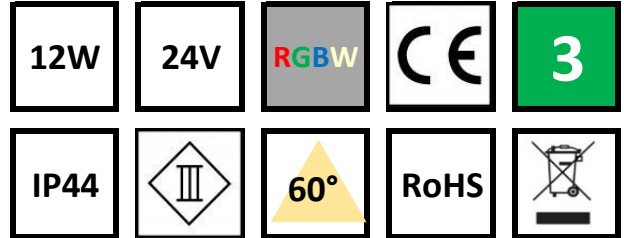

Durable – Delightfull – LED

Alltronic bv
Ringlaan 72
3630 Maasmechelen

T +32 (0)89 51 43 55
E ledsmeet@alltronic.be
W www.alltronic.be

BTW/TVA BE0444.840.218
BNP Paribas fortis BE17 0011 8812 6021
BIC GEBABEBB

